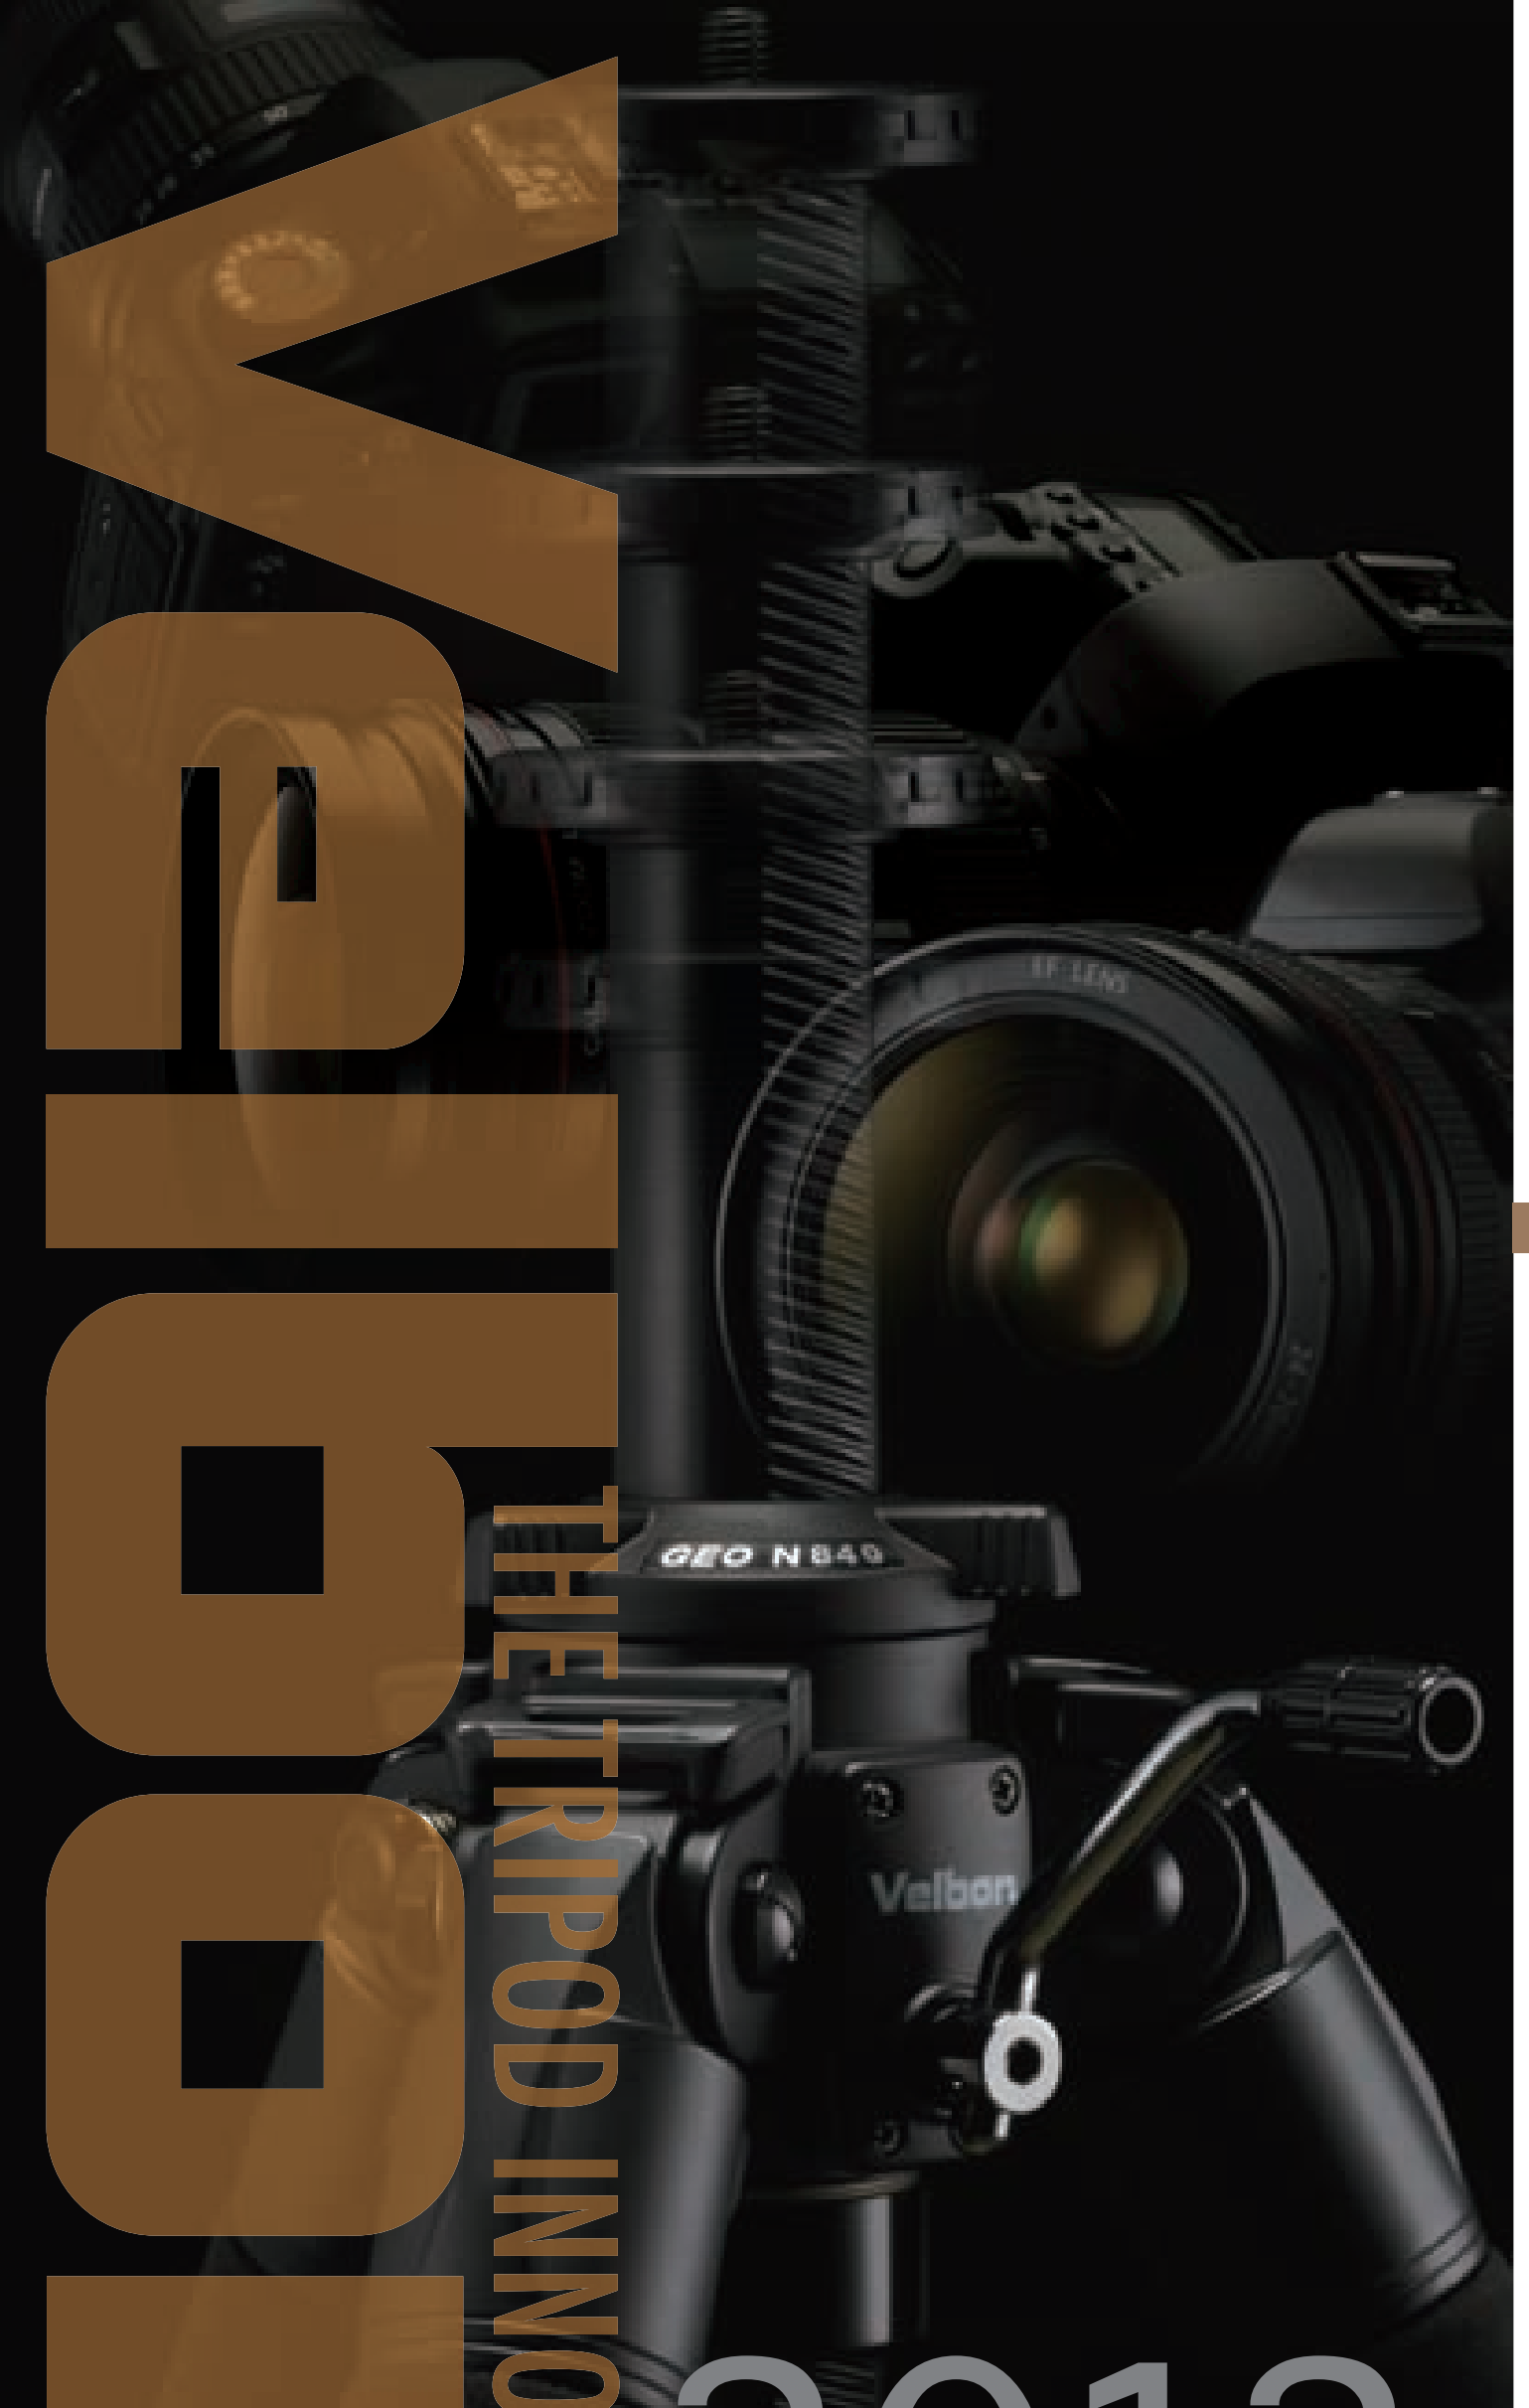

Velbon

THE TRIPOD INNOVATOR

2012

PRODUCTS CATALOGUE

www.velbon.com

- GEO SERIES
- SHERPA SERIES
- UT SERIES
- ULTRA SERIES
- VIDEO SERIES
- CX / C / DF SERIES
- EX SERIES
- OTHERS

Velbon
Velbon Corporation
6-1-5 Nogata, Nakano-ku, Tokyo 165-0027 JAPAN

GEO N730

C carbon · Mg magnesium

MAX cm / inch 191.0 / 75.20
cm / inch 155.0 / 61.03
cm / inch 16.7 / 6.54
cm / inch 70.0 / 27.56
kg / lbs 2.490 / 5.25
Maximum Loading Weight kg / lbs 12.0 / 26.46
Recommended Loading Weight kg / lbs 7.0 / 15.43
③ DIAMETER & SECTION mm / inch 32 / 1.30 | 3
HEAD SCREW & SPARE QUICK RELEASE 3/8 inch
EAN 4907990 440990 UPC 017915 537309

GEO N740

C carbon · Mg magnesium

MAX cm / inch 173.0 / 68.11
cm / inch 146.0 / 57.48
cm / inch 14.0 / 5.51
cm / inch 55.8 / 21.97
kg / lbs 2.31 / 5.09
Maximum Loading Weight kg / lbs 12.0 / 26.46
Recommended Loading Weight kg / lbs 7.0 / 15.43
④ DIAMETER & SECTION mm / inch 32 / 1.30 | 4
HEAD SCREW & SPARE QUICK RELEASE 3/8 inch
EAN 4907990 441010 UPC 017915 537408

GEO N830

C carbon · Mg magnesium

MAX cm / inch 200.0 / 78.74
cm / inch 179.0 / 65.73
cm / inch 35.0 / 13.78
cm / inch 81.7 / 32.17
kg / lbs 3.310 / 7.30
Maximum Loading Weight kg / lbs 14.0 / 30.86
Recommended Loading Weight kg / lbs 9.0 / 19.84
③ DIAMETER & SECTION mm / inch 32 / 1.30 | 3
HEAD SCREW & SPARE QUICK RELEASE 3/8 inch
EAN 4907990 440938 UPC 017915 538306

GEO N840

C carbon · Mg magnesium

MAX cm / inch 201.0 / 79.13
cm / inch 180.0 / 70.86
cm / inch 35.0 / 13.78
cm / inch 68.5 / 26.97
kg / lbs 3.320 / 7.32
Maximum Loading Weight kg / lbs 14.0 / 30.86
Recommended Loading Weight kg / lbs 9.0 / 19.84
④ DIAMETER & SECTION mm / inch 32 / 1.30 | 4
HEAD SCREW & SPARE QUICK RELEASE 3/8 inch
EAN 4907990 440952 UPC 017915 538405

SHERPA 200R

Al aluminium

MAX cm / inch 167.5 / 65.94
cm / inch 137.5 / 54.1
cm / inch 59.0 / 23.23
cm / inch 62.0 / 22.4
kg / lbs 1.95 / 4.3
Maximum Loading Weight kg / lbs 5.0 / 11.02
Recommended Loading Weight kg / lbs 4.0 / 8.82
③ DIAMETER & SECTION mm / inch 26 / 1.02 | 3
HEAD PH-157Q
HEAD SCREW & SPARE QUICK RELEASE QB-157 DIN
EAN 4907990 200877 UPC 017915 412002

SHERPA 250R

Al aluminium

MAX cm / inch 162.0 / 63.78
cm / inch 131.2 / 51.7
cm / inch 59.0 / 23.23
cm / inch 62.5 / 24.61
kg / lbs 2.0 / 4.41
Maximum Loading Weight kg / lbs 5.0 / 11.02
Recommended Loading Weight kg / lbs 4.0 / 8.82
③ DIAMETER & SECTION mm / inch 26 / 1.02 | 3
HEAD PH-157Q
HEAD SCREW & SPARE QUICK RELEASE QB-157 DIN
EAN 4907990 206503 UPC 017915 412507

SHERPA 450R

Al aluminium

MAX cm / inch 173.0 / 68.11
cm / inch 142.0 / 55.9
cm / inch 64.3 / 25.35
cm / inch 67.5 / 26.57
kg / lbs 2.25 / 4.96
Maximum Loading Weight kg / lbs 5.0 / 11.02
Recommended Loading Weight kg / lbs 4.0 / 8.82
③ DIAMETER & SECTION mm / inch 26 / 1.02 | 3
EAN 4907990 206527 UPC 017915 414501

SHERPA 800R

Al aluminium

MAX cm / inch 169.5 / 66.73
cm / inch 139.5 / 54.92
cm / inch 60.0 / 23.62
cm / inch 62.5 / 24.61
kg / lbs 1.95 / 4.30
Maximum Loading Weight kg / lbs 5.0 / 11.02
Recommended Loading Weight kg / lbs 4.0 / 8.82
③ DIAMETER & SECTION mm / inch 26 / 1.02 | 3
HEAD PH-157QK
HEAD SCREW & SPARE QUICK RELEASE QB-157 DIN
EAN 4907990 204585 UPC 017915 418004

SHERPA 803RD

HEAD ONLY Mg magnesium · Al aluminium

MAX cm / inch 163.2 / 64.25
cm / inch 133.6 / 52.60
cm / inch 59.0 / 23.23
cm / inch 60.5 / 23.82
kg / lbs 1.944 / 4.29
Maximum Loading Weight kg / lbs 4.0 / 8.82
Recommended Loading Weight kg / lbs 3.0 / 6.61
③ DIAMETER & SECTION mm / inch 26 / 1.02 | 3
HEAD QHD-53D
HEAD SCREW & SPARE QUICK RELEASE QB-62 DIN
EAN 4907990 402288 UPC 017915 411042

SHERPA 538N

Al aluminium · Birder's Choice

MAX cm / inch 159.5 / 62.8
cm / inch 134.0 / 52.79
cm / inch 59.0 / 23.23
cm / inch 64.5 / 25.39
kg / lbs 2.166 / 4.78
Maximum Loading Weight kg / lbs 3.5 / 7.72
Recommended Loading Weight kg / lbs 2.5 / 5.51
③ DIAMETER & SECTION mm / inch 26 / 1.02 | 3
HEAD FHD-51QN
HEAD SCREW & SPARE QUICK RELEASE QB-F51, F51L
EAN 4907990 306906 UPC 017915 405387

UT-43DⅡ

Al aluminium

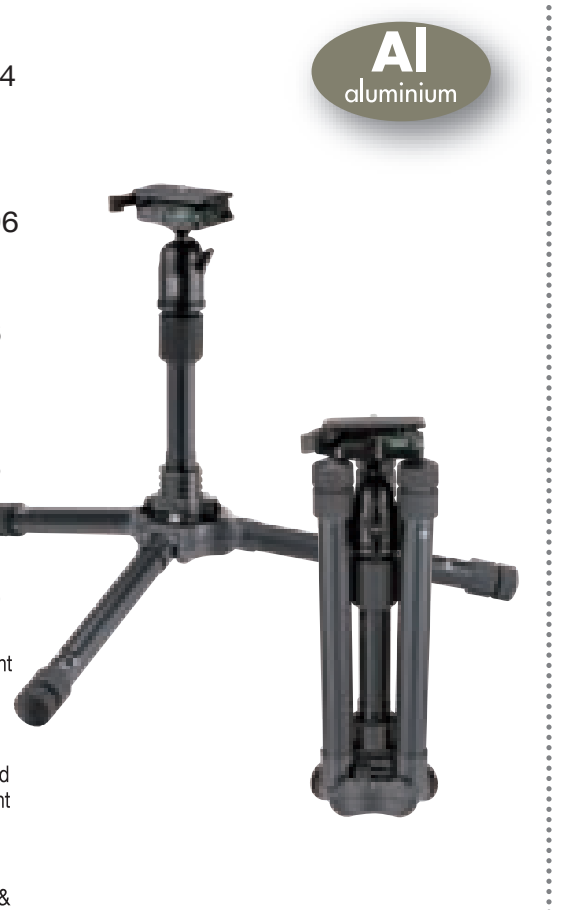

MAX cm / inch 155.8 / 61.34
cm / inch 139.6 / 54.96
cm / inch 34.2 / 13.46
cm / inch 28.9 / 11.38
kg / lbs 1.146 / 2.53
Maximum Loading Weight kg / lbs 3.5 / 7.72
Recommended Loading Weight kg / lbs 3.0 / 6.61
⑥ DIAMETER & SECTION mm / inch 24 / 0.94 | 6
HEAD QHD-43D
HEAD SCREW & SPARE QUICK RELEASE QB-62 DIN
EAN 4907990 424648 UPC 017915 930469

UT-43Q

NEW · Al aluminium

MAX cm / inch 154.5 / 60.83
cm / inch 138.0 / 54.33
cm / inch 33.7 / 13.27
cm / inch 27.2 / 10.71
kg / lbs 1.074 / 2.37
Maximum Loading Weight kg / lbs 6.0 / 13.23
Recommended Loading Weight kg / lbs 2.0 / 4.41
⑥ DIAMETER & SECTION mm / inch 24 / 0.94 | 6
HEAD QHD-U4D
HEAD SCREW & SPARE QUICK RELEASE QB-3B¥
EAN 4907990 324740 UPC 017915 930445

GEO N535D

NEW · C carbon · Mg magnesium

MAX cm / inch 180.5 / 71.06
cm / inch 139.7 / 54.99
cm / inch 28.0 / 11.02
cm / inch 66.5 / 26.18
kg / lbs 1.811 / 3.99
Maximum Loading Weight kg / lbs 8.0 / 17.64
Recommended Loading Weight kg / lbs 3.0 / 6.61
③ DIAMETER & SECTION mm / inch 25 / 0.98 | 3
HEAD PHD-55D
HEAD SCREW & SPARE QUICK RELEASE QB-62 DIN
EAN 4907990 244482 UPC 017915 535350

GEO N543D

NEW · C carbon · Mg magnesium

MAX cm / inch 168.3 / 66.26
cm / inch 136.0 / 53.54
cm / inch 24.5 / 9.64
cm / inch 53.5 / 21.06
kg / lbs 1.667 / 3.68
Maximum Loading Weight kg / lbs 8.0 / 17.64
Recommended Loading Weight kg / lbs 3.0 / 6.61
④ DIAMETER & SECTION mm / inch 28 / 1.10 | 4
HEAD QHD-53D
HEAD SCREW & SPARE QUICK RELEASE QB-62 DIN
EAN 4907990 244505 UPC 017915 535435

GEO N635D

NEW · C carbon · Mg magnesium

MAX cm / inch 189.1 / 74.45
cm / inch 147.0 / 57.87
cm / inch 25.7 / 10.12
cm / inch 69.6 / 27.40
kg / lbs 2.184 / 4.81
Maximum Loading Weight kg / lbs 10.0 / 22.05
Recommended Loading Weight kg / lbs 4.0 / 8.82
③ DIAMETER & SECTION mm / inch 28 / 1.10 | 3
HEAD PHD-65D
HEAD SCREW & SPARE QUICK RELEASE QB-62 DIN
EAN 4907990 244529 UPC 017915 536357

GEO N643D

NEW · C carbon · Mg magnesium

MAX cm / inch 169.8 / 66.85
cm / inch 137.0 / 53.93
cm / inch 22.4 / 8.82
cm / inch 55.0 / 21.64
kg / lbs 1.968 / 4.34
Maximum Loading Weight kg / lbs 10.0 / 22.05
Recommended Loading Weight kg / lbs 4.0 / 8.82
④ DIAMETER & SECTION mm / inch 28 / 1.10 | 4
HEAD QHD-63D
HEAD SCREW & SPARE QUICK RELEASE QB-62 DIN
EAN 4907990 244543 UPC 017915 536432

SHERPA 638N

Al aluminium · NEW · Birder's Choice

MAX cm / inch 160.1 / 63.03
cm / inch 136.1 / 53.58
cm / inch 54.5 / 21.46
cm / inch 70.0 / 27.56
kg / lbs 3.252 / 7.17
Maximum Loading Weight kg / lbs 5.0 / 11.02
Recommended Loading Weight kg / lbs 3.5 / 7.72
③ DIAMETER & SECTION mm / inch 29 / 1.14 | 3
HEAD FHD-61QN
HEAD SCREW & SPARE QUICK RELEASE QB-F51, F51L
EAN 4907990 306944 UPC 017915 406384

SHERPA 4350D

Al aluminium · NEW

MAX cm / inch 161.0 / 63.39
cm / inch 129.4 / 50.94
cm / inch 24.2 / 9.53
cm / inch 58.5 / 23.03
kg / lbs 1.514 / 3.34
Maximum Loading Weight kg / lbs 3.5 / 7.72
Recommended Loading Weight kg / lbs 2.5 / 5.51
③ DIAMETER & SECTION mm / inch 23 / 0.91 | 3
HEAD PH-G40D
HEAD SCREW & SPARE QUICK RELEASE QB-62 DIN
EAN 4907990 433626 UPC 017915 443501

SHERPA 4370D

Al aluminium · NEW

MAX cm / inch 163.3 / 64.29
cm / inch 132.3 / 52.09
cm / inch 25.8 / 10.16
cm / inch 60.3 / 23.74
kg / lbs 1.565 / 3.45
Maximum Loading Weight kg / lbs 3.5 / 7.72
Recommended Loading Weight kg / lbs 2.5 / 5.51
③ DIAMETER & SECTION mm / inch 23 / 0.91 | 3
HEAD PH-157Q
HEAD SCREW & SPARE QUICK RELEASE QB-157 DIN
EAN 4907990 443640 UPC 017915 443709

SHERPA 4430D

Al aluminium · NEW

MAX cm / inch 151.9 / 59.80
cm / inch 127.3 / 50.12
cm / inch 22.2 / 8.74
cm / inch 47.5 / 18.70
kg / lbs 1.299 / 2.86
Maximum Loading Weight kg / lbs 3.5 / 7.72
Recommended Loading Weight kg / lbs 2.5 / 5.51
④ DIAMETER & SECTION mm / inch 23 / 0.91 | 4
HEAD QHD-43D
HEAD SCREW & SPARE QUICK RELEASE QB-62 DIN
EAN 4907990 433644 UPC 017915 444300

SHERPA 5350D

Al aluminium · NEW

MAX cm / inch 169.8 / 66.85
cm / inch 134.8 / 53.07
cm / inch 28.0 / 11.02
cm / inch 62.0 / 24.41
kg / lbs 1.926 / 4.25
Maximum Loading Weight kg / lbs 4.0 / 8.82
Recommended Loading Weight kg / lbs 3.0 / 6.61
③ DIAMETER & SECTION mm / inch 26 / 1.02 | 3
HEAD PH-G50D
HEAD SCREW & SPARE QUICK RELEASE QB-62 DIN
EAN 4907990 433701 UPC 017915 453500

SHERPA 5370D

Al aluminium · NEW

MAX cm / inch 170.0 / 66.93
cm / inch 135.3 / 53.27
cm / inch 28.2 / 11.10
cm / inch 63.0 / 24.80
kg / lbs 1.961 / 4.32
Maximum Loading Weight kg / lbs 4.0 / 8.82
Recommended Loading Weight kg / lbs 3.0 / 6.61
③ DIAMETER & SECTION mm / inch 26 / 1.02 | 3
HEAD PH-157Q
HEAD SCREW & SPARE QUICK RELEASE QB-157 DIN
EAN 4907990 433725 UPC 017915 453708

UT-53D

NEW · Al aluminium

MAX cm / inch 155.3 / 61.14
cm / inch 139.6 / 54.96
cm / inch 35.1 / 13.82
cm / inch 29.8 / 11.73
kg / lbs 1.349 / 2.97
Maximum Loading Weight kg / lbs 4.0 / 8.82
Recommended Loading Weight kg / lbs 3.0 / 6.61
⑥ DIAMETER & SECTION mm / inch 27 / 1.06 | 6
HEAD QHD-53D
HEAD SCREW & SPARE QUICK RELEASE QB-62 DIN
EAN 4907990 424624 UPC 017915 930537

UT-63D

NEW · Al aluminium

MAX cm / inch 156.9 / 61.77
cm / inch 142.9 / 56.26
cm / inch 34.4 / 13.54
cm / inch 30.5 / 12.01
kg / lbs 1.571 / 3.46
Maximum Loading Weight kg / lbs 5.0 / 11.02
Recommended Loading Weight kg / lbs 5.0 / 11.02
⑥ DIAMETER & SECTION mm / inch 30 / 1.18 | 6
HEAD QHD-63D
HEAD SCREW & SPARE QUICK RELEASE QB-62 DIN
EAN 4907990 424600 UPC 017915 930636

GEO E535D

NEW · C carbon · Mg magnesium

MAX cm / inch 182.4 / 71.81
cm / inch 141.6 / 55.74
cm / inch 27.6 / 10.87
cm / inch 66.0 / 25.98
kg / lbs 1.742 / 3.84
Maximum Loading Weight kg / lbs 8.0 / 17.64
Recommended Loading Weight kg / lbs 3.0 / 6.61
③ DIAMETER & SECTION mm / inch 25 / 0.98 | 3
HEAD PHD-53D
HEAD SCREW & SPARE QUICK RELEASE QB-62 DIN
EAN 4907990 244581 UPC 017915 545359

GEO E543D

NEW · C carbon · Mg magnesium

MAX cm / inch 167.9 / 66.10
cm / inch 136.6 / 53.77
cm / inch 24.2 / 9.53
cm / inch 53.0 / 20.86
kg / lbs 1.578 / 3.48
Maximum Loading Weight kg / lbs 8.0 / 17.64
Recommended Loading Weight kg / lbs 3.0 / 6.61
④ DIAMETER & SECTION mm / inch 25 / 0.98 | 4
HEAD QHD-53D
HEAD SCREW & SPARE QUICK RELEASE QB-62 DIN
EAN 4907990 244567 UPC 017915 545434

GEO E635D

NEW · C carbon · Mg magnesium

MAX cm / inch 183.0 / 72.05
cm / inch 142.5 / 56.10
cm / inch 24.2 / 9.53
cm / inch 68.0 / 26.77
kg / lbs 2.051 / 4.52
Maximum Loading Weight kg / lbs 10.0 / 22.05
Recommended Loading Weight kg / lbs 4.0 / 8.82
③ DIAMETER & SECTION mm / inch 28 / 1.10 | 3
HEAD PHD-65D
HEAD SCREW & SPARE QUICK RELEASE QB-62 DIN
EAN 4907990 244604 UPC 017915 546349

GEO E643D

NEW · C carbon · Mg magnesium

MAX cm / inch 168.1 / 66.18
cm / inch 137.7 / 54.21
cm / inch 22.4 / 8.82
cm / inch 53.8 / 21.18
kg / lbs 1.827 / 4.03
Maximum Loading Weight kg / lbs 10.0 / 22.05
Recommended Loading Weight kg / lbs 4.0 / 8.82
④ DIAMETER & SECTION mm / inch 28 / 1.10 | 4
HEAD QHD-63D
HEAD SCREW & SPARE QUICK RELEASE QB-62 DIN
EAN 4907990 244628 UPC 017915 546431

SHERPA 5430D

Al aluminium · NEW

MAX cm / inch 157.0 / 61.81
cm / inch 131.0 / 51.57
cm / inch 24.9 / 9.80
cm / inch 51.0 / 20.08
kg / lbs 1.633 / 3.60
Maximum Loading Weight kg / lbs 4.0 / 8.82
Recommended Loading Weight kg / lbs 3.0 / 6.61
④ DIAMETER & SECTION mm / inch 26 / 1.02 | 4
HEAD QHD-53D
HEAD SCREW & SPARE QUICK RELEASE QB-62 DIN
EAN 4907990 433763 UPC 017915 454309

SHERPA 5470D

Al aluminium · NEW

MAX cm / inch 157.6 / 62.05
cm / inch 131.3 / 51.69
cm / inch 25.5 / 10.04
cm / inch 52.4 / 20.63
kg / lbs 1.961 / 4.32
Maximum Loading Weight kg / lbs 4.0 / 8.82
Recommended Loading Weight kg / lbs 3.0 / 6.61
③ DIAMETER & SECTION mm / inch 26 / 1.02 | 4
HEAD PH-157Q
HEAD SCREW & SPARE QUICK RELEASE QB-157 DIN
EAN 4907990 433787 UPC 017915 454705

SHERPA+ 530

Mg magnesium

MAX cm / inch 152.5 / 60.04
cm / inch 123.3 / 48.5
cm / inch 16.0 / 6.30
cm / inch 53.0 / 20.87
kg / lbs 1.37 / 3.02
Maximum Loading Weight kg / lbs 5.0 / 11.02
Recommended Loading Weight kg / lbs 3.5 / 7.72
③ DIAMETER & SECTION mm / inch 26 / 1.02 | 3
HEAD SCREW & SPARE QUICK RELEASE 1/4 inch
EAN 4907990 433909 UPC 017915 419537

SHERPA+ 630

Mg magnesium

MAX cm / inch 163.0 / 64.17
cm / inch 130.5 / 51.4
cm / inch 12.0 / 4.72
cm / inch 56.0 / 22.05
kg / lbs 1.67 / 3.68
Maximum Loading Weight kg / lbs 6.0 / 13.23
Recommended Loading Weight kg / lbs 4.0 / 8.82
③ DIAMETER & SECTION mm / inch 29 / 1.14 | 3
HEAD SCREW & SPARE QUICK RELEASE 3/8&1/4 inch
EAN 4907990 433862 UPC 017915 419636

Mark-7B SET

Al aluminium

MAX cm / inch 179.7 / 70.75
cm / inch 158.7 / 62.48
cm / inch 59.7 / 23.5
cm / inch 81.7 / 31.17
kg / lbs 5.15 / 11.35
Maximum Loading Weight kg / lbs 12.0 / 26.46
Recommended Loading Weight kg / lbs 7.0 / 15.43
③ DIAMETER & SECTION mm / inch 32 / 1.26 | 3
HEAD PH-270B
HEAD SCREW & SPARE QUICK RELEASE 3/8&1/4 inch
EAN 4907990 111944 UPC 017915 500778

ULTREK 45L

Al aluminium

MAX cm / inch 156.5 / 71.06
cm / inch 138.8 / 54.6
cm / inch 29.5 / 11.61
cm / inch 29.0 / 11.42
kg / lbs 1.23 / 2.71
Maximum Loading Weight kg / lbs 3.0 / 6.61
Recommended Loading Weight kg / lbs 2.0 / 4.11
⑥ DIAMETER & SECTION mm / inch 24 / 0.94 | 6
HEAD PHD-42Q
HEAD SCREW & SPARE QUICK RELEASE QB-62 DIN
EAN 4907990 131904 UPC 017915 930452

ULTRA MAX i M

Al aluminium

MAX cm / inch 138.5 / 54.53
cm / inch 116.5 / 45.9
cm / inch 16.5 / 6.50
cm / inch 33.5 / 13.19
kg / lbs 0.92 / 2.03
Maximum Loading Weight kg / lbs 2.0 / 4.41
Recommended Loading Weight kg / lbs 1.5 / 3.31
⑤ DIAMETER & SECTION mm / inch 21 / 0.826 | 5
HEAD PHD-31Q
HEAD SCREW & SPARE QUICK RELEASE QB-3B
EAN 4907990 404862 UPC 017915 910058

ULTRA MAX i L

Al aluminium

MAX cm / inch 152.5 / 60.0
cm / inch 127.5 / 50.2
cm / inch 16.5 / 6.50
cm / inch 36.0 / 14.17
kg / lbs 0.99 / 2.18
Maximum Loading Weight kg / lbs 2.0 / 4.41
Recommended Loading Weight kg / lbs 1.5 / 3.31
⑤ DIAMETER & SECTION mm / inch 21 / 0.826 | 5
HEAD PHD-31Q
HEAD SCREW & SPARE QUICK RELEASE QB-3B
EAN 4907990 405029 UPC 017915 910065

DV-6000

Al aluminium

MAX cm / inch 156.5 / 61.61
cm / inch 126.5 / 49.8
cm / inch 51.0 / 20.08
cm / inch 66.0 / 25.98
kg / lbs 2.2 / 4.85
Maximum Loading Weight kg / lbs 5.0 / 11.02
Recommended Loading Weight kg / lbs 4.0 / 8.82
③ DIAMETER & SECTION mm / inch 26 / 1.02 | 3
HEAD PH-358
HEAD SCREW & SPARE QUICK RELEASE QB-5RL
EAN 4907990 205698 UPC 017915 628809

DV-7000

Al aluminium

MAX cm / inch 162.5 / 63.98
cm / inch 140.5 / 55.3
cm / inch 56.8 / 22.36
cm / inch 70.0 / 27.6
kg / lbs 3.37 / 7.43
Maximum Loading Weight kg / lbs 6.0 / 13.23
Recommended Loading Weight kg / lbs 4.5 / 9.92
③ DIAMETER & SECTION mm / inch 29 / 1.14 | 3
HEAD PH-368
HEAD SCREW & SPARE QUICK RELEASE QB-6RL
EAN 4907990 205704 UPC 017915 628915

CX-mini

Al aluminium

MAX cm / inch 64.0 / 25.20
cm / inch 22.0 / 8.66
cm / inch 30.0 / 11.81
kg / lbs 0.79 / 1.74
Maximum Loading Weight kg / lbs 2.0 / 4.41
Recommended Loading Weight kg / lbs 2.0 / 4.41
③ DIAMETER & SECTION mm / inch 20 / 0.79 | 3
HEAD SCREW & SPARE QUICK RELEASE QB-4LC
EAN 4907990 205421 UPC 017915 205017

CX-200

Al aluminium

MAX cm / inch 115.0 / 45.28
cm / inch 91.0 / 35.83
cm / inch 44.0 / 17.321
kg / lbs 1.0 / 2.20
Maximum Loading Weight kg / lbs 2.0 / 4.41
Recommended Loading Weight kg / lbs 1.0 / 2.20
③ DIAMETER & SECTION mm / inch 20 / 0.79 | 3
HEAD SCREW & SPARE QUICK RELEASE Not available
EAN 4907990 205322

CX-300

Al aluminium

MAX cm / inch 145.0 / 57.1
cm / inch 121.0 / 47.65
cm / inch 44.0 / 17.321
kg / lbs 1.0 / 2.20
Maximum Loading Weight kg / lbs 2.0 / 4.41
Recommended Loading Weight kg / lbs 1.0 / 2.20
③ DIAMETER & SECTION mm / inch 20 / 0.79 | 3
HEAD SCREW & SPARE QUICK RELEASE Not available
EAN 4907990 205162 UPC 017915 203006

CX-440

Al aluminium

MAX cm / inch 144.0 / 56.69
cm / inch 114.0 / 44.88
cm / inch 54.0 / 21.26
kg / lbs 1.2 / 2.65
Maximum Loading Weight kg / lbs 2.0 / 4.41
Recommended Loading Weight kg / lbs 1.0 / 2.20
③ DIAMETER & SECTION mm / inch 20 / 0.79 | 3
HEAD SCREW & SPARE QUICK RELEASE QB-4LC
EAN 4907990 205100 UPC 017915 204409

CX-444

Al aluminium

MAX cm / inch 145.0 / 57.09
cm / inch 121.0 / 47.64
cm / inch 48.0 / 18.9
kg / lbs 1.3 / 2.87
Maximum Loading Weight kg / lbs 2.5 / 5.51
Recommended Loading Weight kg / lbs 1.5 / 3.31
④ DIAMETER & SECTION mm / inch 23 / 0.91 | 4
HEAD SCREW & SPARE QUICK RELEASE QB-4W
EAN 4907990 405586 UPC 017915 204447

EX-430

Al aluminium · NEW

MAX cm / inch 151.0 / 59.4
cm / inch 124.7 / 49.1
cm / inch 56.0 / 22.0
kg / lbs 1.20 / 2.65
Maximum Loading Weight kg / lbs 2.0 / 4.41
Recommended Loading Weight kg / lbs 1.0 / 2.20
3 DIAMETER & SECTION mm / inch 20 / 0.78 | 3
SPARE QUICK RELEASE PLATE QB-46 DIN
EAN 4907990 301529 UPC 017915 704305

EX-440

Al aluminium · NEW

MAX cm / inch 153 / 60.2
cm / inch 126.7 / 49.9
cm / inch 47.0 / 18.5
kg / lbs 1.18 / 2.60
Maximum Loading Weight kg / lbs 2.0 / 4.41
Recommended Loading Weight kg / lbs 1.0 / 2.20
4 DIAMETER & SECTION mm / inch 20 / 0.78 | 4
SPARE QUICK RELEASE PLATE QB-46 DIN
EAN 4907990 301529 UPC 017915 704305

EX-530

Al aluminium · NEW

MAX cm / inch 156.0 / 61.4
cm / inch 124.2 / 48.9
cm / inch 57.0 / 22.4
kg / lbs 1.45 / 3.2
Maximum Loading Weight kg / lbs 4.0 / 8.82
Recommended Loading Weight kg / lbs 2.0 / 4.41
4 DIAMETER & SECTION mm / inch 23 / 0.91 | 4
SPARE QUICK RELEASE PLATE QB-46 DIN
EAN 4907990 301406 UPC 017915 705302

ULTRA LUX i M

Al aluminium

MAX cm / inch 138.5 / 54.5
cm / inch 118.0 / 46.5
cm / inch 19.0 / 7.48
cm / inch 34.5 / 13.58
kg / lbs 1.26 / 2.78
Maximum Loading Weight kg / lbs 3.0 / 6.61
Recommended Loading Weight kg / lbs 2.0 / 4.41
⑤ DIAMETER & SECTION mm / inch 24 / 0.94 | 5
HEAD PHD-41Q
HEAD SCREW & SPARE QUICK RELEASE QB-145 DIN
EAN 4907990 404824 UPC 017915 911048

ULTRA LUX i L

Al aluminium

MAX cm / inch 161.0 / 63.39
cm / inch 136.0 / 53.5
cm / inch 19.0 / 7.48
cm / inch 39.0 / 15.35
kg / lbs 1.32 / 2.91
Maximum Loading Weight kg / lbs 3.0 / 6.61
Recommended Loading Weight kg / lbs 2.0 / 4.41
⑤ DIAMETER & SECTION mm / inch 24 / 0.94 | 5
HEAD PHD-41Q
HEAD SCREW & SPARE QUICK RELEASE QB-145 DIN
EAN 4907990 405005 UPC 017915 911055

ULTRA VOXi L(A)

Al aluminium

MAX cm / inch 154.0 / 60.63
cm / inch 130.0 / 51.18
cm / inch 12.3 / 4.84
cm / inch 36.0 / 14.2
kg / lbs 1.10 / 2.49
Maximum Loading Weight kg / lbs 4.0 / 8.83
Recommended Loading Weight kg / lbs 3.5 / 7.73
⑤ DIAMETER & SECTION mm / inch 27 / 1.06 | 5
HEAD SCREW & SPARE QUICK RELEASE 1/4 inch
EAN 4907990 400239 UPC 017915 911109

ULTRA MAXi mini D

Al aluminium

MAX cm / inch 49.6 / 19.53
cm / inch 41.8 / 16.46
cm / inch 15.5 / 6.10
cm / inch 20.0 / 7.87
kg / lbs 0.67 / 1.48
Maximum Loading Weight kg / lbs 2.5 / 5.51
Recommended Loading Weight kg / lbs 2.0 / 4.41
⑤ DIAMETER & SECTION mm / inch 21 / 0.826 | 5
HEAD QHD-43D
HEAD SCREW & SPARE QUICK RELEASE QB-62 DIN
EAN 4907990 437747 UPC 017915 910089

DV-7500

Al aluminium · NEW

MAX cm / inch 160.0 / 62.99
cm / inch 126.0 / 49.61
cm / inch 56.0 / 22.05
cm / inch 66.0 / 25.98
kg / lbs 2.991 / 6.59
Maximum Loading Weight kg / lbs 5.0 / 11.02
Recommended Loading Weight kg / lbs 4.5 / 9.92
③ DIAMETER & SECTION mm / inch 29 / 1.14 | 3
HEAD PHD-62Q
HEAD SCREW & SPARE QUICK RELEASE QB-62 DIN
EAN 4907990 205735 UPC 017915 628953

Videomate 438

Al aluminium · NEW

MAX cm / inch 153.5 / 60.43
cm / inch 126.5 / 49.80
cm / inch 59.0 / 23.23
kg / lbs 1.23 / 2.71
Maximum Loading Weight kg / lbs 2.0 / 4.41
Recommended Loading Weight kg / lbs 1.0 / 2.20
③ DIAMETER & SECTION mm / inch 20 / 0.79 | 3
HEAD SCREW & SPARE QUICK RELEASE QB-4L
EAN 4907990 360205 UPC 017915 424388

CX-560

Al aluminium

MAX cm / inch 150.0 / 59.06
cm / inch 117.0 / 46.07
cm / inch 56.5 / 22.24
kg / lbs 1.54 / 3.4
Maximum Loading Weight kg / lbs 2.0 / 4.41
Recommended Loading Weight kg / lbs 2.0 / 4.41
⑥ DIAMETER & SECTION mm / inch 23 / 0.91 | 6
HEAD SCREW & SPARE QUICK RELEASE QB-W5
EAN 4907990 203229 UPC 017915 305601

CX-660

Al aluminium

MAX cm / inch 162.0 / 63.8
cm / inch 129.0 / 50.8
cm / inch 61.0 / 24.0
kg / lbs 1.72 / 3.79
Maximum Loading Weight kg / lbs 4.0 / 8.82
Recommended Loading Weight kg / lbs 2.5 / 5.51
③ DIAMETER & SECTION mm / inch 26.8 / 1.06 | 3
HEAD SCREW & SPARE QUICK RELEASE QB-W5
EAN 4907990 202161 UPC 017915 426603

NOTES DIN

Size of the standard base of quick release plates – 42mm x 42mm. Since the base is square, the user can choose the direction of the plate according to the camera and lens. As long as the base is the standard DIN size, quick release plates are interchangeable.

NOTES Maximum Loading Weight and Recommended Loading Weight

Velbon tripods are made to be strong enough to support heavy loads. However, even if a tripod can support a 10kg load, this is not the optimum load for actual working applications. For this reason, Velbon specifications indicate both the maximum loading weight and the recommended loading weight, which is the optimum practical load for comfortably mastering most shooting situations. For security and safety, Velbon suggests using your tripod with the recommended loading weight.

CX-888 BLACK

Al aluminium

MAX cm / inch 145.0 / 57.09
cm / inch 121.0 / 47.64
cm / inch 48.0 / 18.9
kg / lbs 1.3 / 2.87
Maximum Loading Weight kg / lbs 2.0 / 4.41
Recommended Loading Weight kg / lbs 1.5 / 3.31
④ DIAMETER & SECTION mm / inch 23 / 0.91 | 4
HEAD SCREW & SPARE QUICK RELEASE QB-4W
EAN 4907990 201904

C-400

Al aluminium

MAX cm / inch 146.0 / 57.48
cm / inch 116.0 / 45.67
cm / inch 57.0 / 22.4
kg / lbs 1.3 / 2.87
Maximum Loading Weight kg / lbs 2.0 / 4.41
Recommended Loading Weight kg / lbs 1.0 / 2.20
③ DIAMETER & SECTION mm / inch 20 / 0.79 | 3
HEAD SCREW & SPARE QUICK RELEASE QB-4L
EAN 4907990 201881 UPC 017915 001076

EX-540

Al aluminium · NEW

MAX cm / inch 156.0 / 61.4
cm / inch 129.5 / 51.0
cm / inch 49.0 / 19.3
kg / lbs 1.43 / 3.15
Maximum Loading Weight kg / lbs 4.0 / 8.82
Recommended Loading Weight kg / lbs 2.0 / 4.41
4 DIAMETER & SECTION mm / inch 23 / 0.91 | 4
SPARE QUICK RELEASE PLATE QB-46 DIN
EAN 4907990 301369 UPC 017915 705401

EX-630

Al aluminium · NEW

MAX cm / inch 168.0 / 66.1
cm / inch 134.8 / 53.1
cm / inch 61.4 / 24.2
kg / lbs 1.692 / 3.73
Maximum Loading Weight kg / lbs 5.0 / 11.02
Recommended Loading Weight kg / lbs 3.0 / 6.61
4 DIAMETER & SECTION mm / inch 26 / 1.02 | 4
SPARE QUICK RELEASE PLATE QB-46 DIN
EAN 4907990 301321 UPC 017915 706309

EX-640

Al aluminium · NEW

MAX cm / inch 170.0 / 66.9
cm / inch 142.8 / 56.2
cm / inch 53.5 / 21.1
kg / lbs 1.672 / 3.69
Maximum Loading Weight kg / lbs 5.0 / 11.02
Recommended Loading Weight kg / lbs 3.0 / 6.61
3 DIAMETER & SECTION mm / inch 26 / 1.02 | 3
SPARE QUICK RELEASE PLATE QB-46 DIN
EAN 4907990 301284 UPC 017915 706408

ULTRA MAXi mini Ⅲ WT

Al aluminium · NEW

MAX cm / inch 47.7 / 18.78
cm / inch 39.9 / 15.71
cm / inch 13.5 / 5.31
cm / inch 19.0 / 7.48
kg / lbs 0.565 / 1.25
Maximum Loading Weight kg / lbs 2.5 / 3.31
Recommended Loading Weight kg / lbs 1.5 / 3.31
⑤ DIAMETER & SECTION mm / inch 21 / 0.826 | 5
HEAD QHD-43
HEAD SCREW & SPARE QUICK RELEASE 1/4 inch
EAN 4907990 412461 UPC 017915 910096

ULTRA REXi L(A)

Al aluminium

MAX cm / inch 153.0 / 60.24
cm / inch 129.0 / 50.79
cm / inch 9.5 / 3.74
cm / inch 36.0 / 14.17
kg / lbs 1.30 / 2.87
Maximum Loading Weight kg / lbs 5.0 / 11.03
Recommended Loading Weight kg / lbs 4.0 / 8.82
⑤ DIAMETER & SECTION mm / inch 30 / 1.18 | 5
HEAD SCREW & SPARE QUICK RELEASE 1/4 & 3/8 inch
EAN 4907990 400253 UPC 017915 911208

P-MAX

Al aluminium

cm / inch 131.0 / 51.57
cm / inch 37.0 / 14.57
cm / inch 35.0 / 13.78
kg / lbs 0.8 / 1.76
Maximum Loading Weight kg / lbs 2.0 / 4.41
Recommended Loading Weight kg / lbs 1.5 / 3.31
⑤ DIAMETER & SECTION mm / inch 21 / 0.826 | 5
HEAD PH-337
HEAD SCREW & SPARE QUICK RELEASE QB-4X
EAN 4907990 404404 UPC 017915 303706

MAXi 347GB

Al aluminium

MAX cm / inch 158.5 / 62.4
cm / inch 126.9 / 50.0
cm / inch 42.7 / 16.81
cm / inch 42.7 / 16.81
kg / lbs 1.2 / 2.65
Maximum Loading Weight kg / lbs 2.0 / 4.41
Recommended Loading Weight kg / lbs 1.5 / 3.31
⑤ DIAMETER & SECTION mm / inch 20 / 0.79 | 3
HEAD PHD-31Q
HEAD SCREW & SPARE QUICK RELEASE QB-3B
EAN 4907990 404725 UPC 017915 303621

Videomate 538

Al aluminium · NEW

MAX cm / inch 161.0 / 63.39
cm / inch 128.0 / 50.39
cm / inch 61.0 / 24.02
kg / lbs 1.631 / 3.60
Maximum Loading Weight kg / lbs 3.0 / 6.61
Recommended Loading Weight kg / lbs 2.0 / 4.41
③ DIAMETER & SECTION mm / inch 23 / 0.91 | 3
HEAD SCREW & SPARE QUICK RELEASE QB-5RL
EAN 4907990 360229 UPC 017915 425385

Videomate 638

Al aluminium · NEW

MAX cm / inch 171.0 / 67.32
cm / inch 138.5 / 54.53
cm / inch 67.0 / 26.38
kg / lbs 1.984 / 4.37
Maximum Loading Weight kg / lbs 4.0 / 8.82
Recommended Loading Weight kg / lbs 3.0 / 6.61
③ DIAMETER & SECTION mm / inch 26 / 1.02 | 3
HEAD SCREW & SPARE QUICK RELEASE QB-6RL
EAN 4907990 360243 UPC 017915 426382

C-500

Al aluminium

MAX cm / inch 152.0 / 59.84
cm / inch 122.0 / 48.03
cm / inch 62.0 / 24.41
kg / lbs 1.7 / 3.75
Maximum Loading Weight kg / lbs 2.5 / 5.51
Recommended Loading Weight kg / lbs 1.5 / 3.31
③ DIAMETER & SECTION mm / inch 23 / 0.91 | 3
HEAD SCREW & SPARE QUICK RELEASE QB-5RL
EAN 4907990 201843 UPC 017915 001083

C-600

Al aluminium

MAX cm / inch 163.0 / 64.17
cm / inch 130.0 / 51.18
cm / inch 67.0 / 26.38
kg / lbs 2.0 / 4.41
Maximum Loading Weight kg / lbs 3.0 / 6.61
Recommended Loading Weight kg / lbs 2.0 / 4.41
③ DIAMETER & SECTION mm / inch 27 / 1.06 | 3
HEAD SCREW & SPARE QUICK RELEASE QB-6RL
EAN 4907990 201928 UPC 017915 001090

DF-40

Al aluminium

MAX cm / inch 144.0 / 56.7
cm / inch 51.0 / 20.1
cm / inch 54.0 / 21.3
kg / lbs 1.09 / 2.4
Maximum Loading Weight kg / lbs 2.0 / 4.41
Recommended Loading Weight kg / lbs 1.0 / 2.20
③ DIAMETER & SECTION mm / inch 20 / 0.79 | 3
HEAD SCREW & SPARE QUICK RELEASE QB-4LC
EAN 4907990 205933 UPC 017915 200401

DF-50

Al aluminium

MAX cm / inch 152.0 / 59.84
cm / inch 58.0 / 22.8
cm / inch 58.0 / 22.8
kg / lbs 1.49 / 3.25
Maximum Loading Weight kg / lbs 2.5 / 5.51
Recommended Loading Weight kg / lbs 2.0 / 4.41
③ DIAMETER & SECTION mm / inch 23.2 / 0.91 | 3
HEAD SCREW & SPARE QUICK RELEASE QB-4W
EAN 4907990 205957 UPC 017915 300507

DF-60

Al aluminium

MAX cm / inch 162.0 / 63.8
cm / inch 58.0 / 22.8
cm / inch 61.0 / 24.0
kg / lbs 1.826 / 4.03
Maximum Loading Weight kg / lbs 3.0 / 6.61
Recommended Loading Weight kg / lbs 2.5 / 5.51
③ DIAMETER & SECTION mm / inch 26.8 / 1.06 | 3
HEAD SCREW & SPARE QUICK RELEASE QB-W5
EAN 4907990 205971 UPC 017915 400603

EX-888

Al aluminium · NEW

MAX cm / inch 153.0 / 60.2
cm / inch 126.7 / 49.9
cm / inch 45.85 / 18.05
kg / lbs 1.29 / 2.8
Maximum Loading Weight kg / lbs 3.0 / 6.61
Recommended Loading Weight kg / lbs 1.5 / 3.31
3 DIAMETER & SECTION mm / inch 23 / 0.91 | 3
SPARE QUICK RELEASE PLATE QB-46 DIN
EAN 4907990 201904 UPC 017915 708884

CUBE

Al aluminium

MAX cm / inch 94.0 / 37.0
cm / inch 24.0 / 9.49
kg / lbs 0.39 / 0.86
Maximum Loading Weight kg / lbs 0.6 / 1.32
Recommended Loading Weight kg / lbs 0.4 / 0.88
8 DIAMETER & SECTION mm / inch 16 / 0.63 | 8
EAN 4907990 306500 UPC 017915 110007

VS

Al aluminium

MAX cm / inch 160.5 / 63.19
cm / inch 140.5 / 55.32
cm / inch 23.5 / 9.25
cm / inch 57.5 / 22.64
kg / lbs 1.84 / 4.06
Maximum Loading Weight kg / lbs 3.5 / 7.72
Recommended Loading Weight kg / lbs 3.0 / 6.61
④ DIAMETER & SECTION mm / inch 23 / 0.91 | 4
HEAD QHD-53D
HEAD SCREW & SPARE QUICK RELEASE QB-62 DIN
EAN 4907990 369840 UPC 017915 634435